



How to Use The Snap Source® Products The SnapSetter® Snap Attaching Tool





The SnapSetter® has three parts:

Top (with label)

Middle Positioning Bar

Main Base

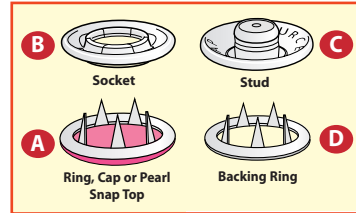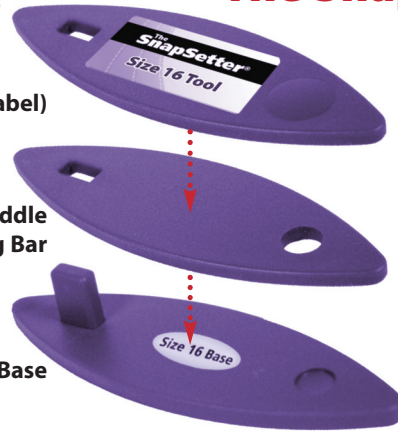

What's our secret to secure snap attachment? It's the SnapSetter®!

How does the SnapSetter® work?

Simply position the snap parts with fabric in-between the layers of the SnapSetter® and hammer into place.

Project Idea:

Replace the buttons on shirts with snaps. Simply attach the Snap Top/Socket over the existing buttonhole. Remove the button and attach the Stud/Ring in it's place.

Hints and Tips


To get into the tight areas surrounding multiple stitched layers on cuffs, diaper openings or jacket fronts:

Using any SnapSetter® Tool Main or Adapter Base, begin setting the snap. Hammer only once to set the snap loosely on the fabric. Disassemble the SnapSetter®. Reposition the fabric with snap onto the SnapSetter® Main or Adapter Base and place the Middle Positioning Bar over the post outward away from the Tool Base. Add the Tool Top. The only two SnapSetter® pieces touching the snap should be the Tool Top and Base allowing the fabric's bulky layers to not interfere with the attaching process. Hammer the Tool twice more to set the snap tightly onto the fabric.




Removing Snaps:

If you need to remove a snap, gently twist a screwdriver back and forth to loosen the prongs all around the socket or stud. Repeat these steps to remove the parts from the opposite side of the garment.

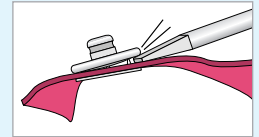

Double Closure:

Replace the Backing Ring with a Decorative Snap Top for a double closure of color.

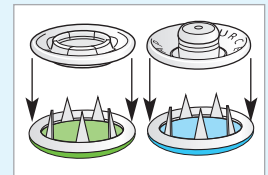

The SnapSetter® Instructions:



1

Disassemble the three Tool pieces by pushing on the post while lifting the middle and top sections.



2

Place the Tool Base on a firm surface. With prongs facing up, place the Snap Top (A) in the indented area of the Tool Base.



3

Place the fabric over the prong points.



4

Slide the Middle Positioning Bar over the post onto the Main Base.



5

With the right side facing up, place the Socket (B) into the Middle Positioning Bar (the raised side down toward the fabric).*



6

Slide the Tool Top over the post onto the Middle Positioning Bar.



7

Hammer the snap parts into place on a firm surface, such as marble or steel.



8

Repeat steps 1-7 to attach the Backing Ring (D) to the Stud (C).

*Which way does the socket go?

There is a right and a wrong side of the Socket. Place the Socket, with the raised side over prong points. Be sure the side with the slits on the inner ring faces up (looks like a flower). If the closure does not hold, the Socket was placed upside down.